


GANTRY TYPE MACHINING CENTRE

vhs^m

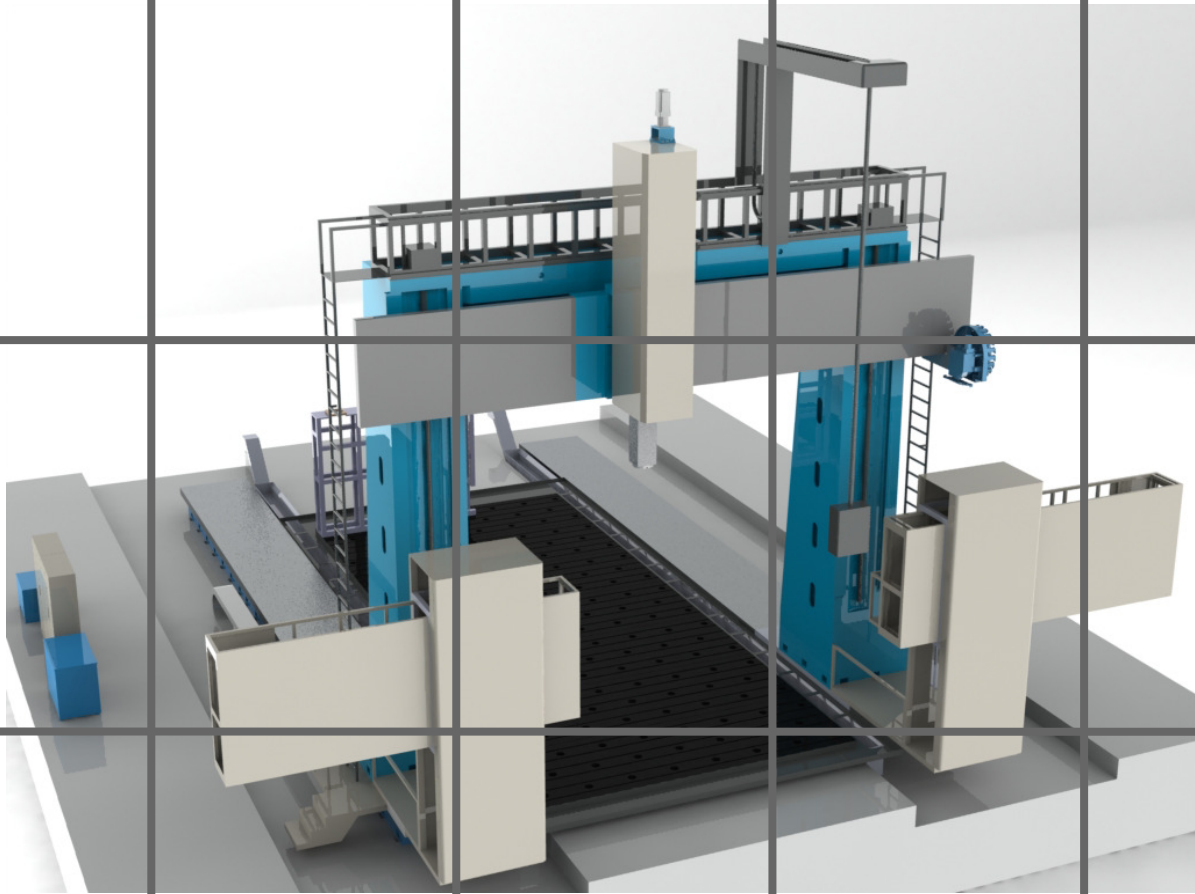

VHS MECHATRONICS SERVICES (P) LTD.,

**STRENGTH
PRECISION
RELIABILITY**

GANTRY TYPE MACHINING CENTRES - GMC SERIES

| DESCRIPTION | GMC 2500 | GMC 3000 | GMC 3500 | GMC 4000 | GMC 6000 | GMC 7000 |
|--|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Distance between Columns(Gantry)-MM | 2500 | 3000 | 3500 | 4000 | 6000 | 7000 |
| Area of Floor Plates with X Length | 2000 x 6000+15000 | 2500 x 6000+15000 | 3000 x 6000+15000 | 3500 x 6000+15000 | 5000 x 6000-15000 | 6000 x 6000-15000 |
| Y, Y1 axis travel of Gantry -MM | 2500 - 15000 | 3000 - 15000 | 3500 - 15000 | 4000 - 15000 | 5000 - 15000 | 7000 - 15000 |
| X axis Cross travel of Vertical RAM-MM | 3000 | 3500 | 4000 | 4500 | 6500 | 7500 |
| Z axis Vertical travel of RAM -MM | 1000 - 2000 | 1000 - 2000 | 1000 - 2000 | 1000 - 2000 | 1000 - 2000 | 1000 - 2000 |
| Distance from Spindle nose to Floor Plate - MM | 1500 - 3000 | 1500 - 3000 | 1500 - 3500 | 1500 - 3500 | 1500 - 4000 | 2000 - 6000 |
| RAM size -MM | 250Sq | 250Sq | 250Sq | 340Sq | 340Sq | 400Sq |
| Spindle nose | BT50/ HSK 100 | BT50/ HSK 100 | BT50/ HSK 100 | BT50/ HSK 100 | BT50/ HSK 100 | BT50/ HSK 100 |
| Speed range -MM | 50 - 2000 | 50 - 2000 | 50 - 2000 | 50 - 2000 | 50 - 2000 | 50 - 2000 |
| Spindle Power -MM | 22KW | 22KW | 22KW | 30KW | 30KW | 30KW |

VHS MECHATRONICS SERVICES (P) LTD.,

OFFICE & WORKS:

F84, 8TH MAIN ROAD, 4TH CROSS, SIPCOT INDUSTRIAL ESTATE,
IRRUNKATUKOTTAI, SRIPERUMPUDUR TALUK,
TAMIL NADU -602105, INDIA

e-mail : info@groupmechatronics.com

Website : www.prasadnc.com / www.vhsmechatronics.com / www.groupmechatronics.com